




Name: Mesurflo® 2513

Sizes: 1/2", 3/4" and 1"

GPM: 0.5 - 9.0

Type: Inline Automatic Balancing Valve

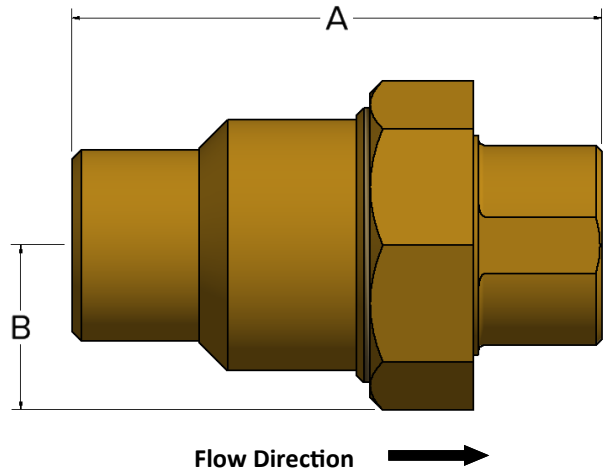

Standard Features:

- 1/2", 3/4" and 1" FSWT Inlet /Outlet Connections
- 3/4" Female and Male Garden Hose Inlet/Outlet Connections
- 1/2" and 3/4" FNPT and MNPT Inlet/Outlet Connections
- Changeable GPM Flow Cartridges
- Differential Operating Pressure:
2 - 80 PSID 0.5 - 5.0 GPM
3 - 80 PSID 5.5 - 9.0 GPM
- ± 10% Accuracy
- Operating Temperature Range 32°F to 225°F
- Dryseal Pipe Threads
- Valves Labeled with Model Number, Size and Flow Rate
- Valve Body Suitable for 600 PSIG

Material Specifications	
Valve Body	Brass
Tailpiece	Brass
Coupling Nut	Brass
O-Rings	EPDM
Diaphragm	EPDM
Orifice	Polyphenylsulfone

Dimensions			
A		B	
in	mm	in	mm
3.4	86.4	1.3	33.1

This product complies with the requirements of the Buy American Act (BAA). Proudly assembled in the USA, we are dedicated to delivering superior product quality while supporting government initiatives to source materials and components from domestic suppliers and suppliers in qualifying countries.