




**Model: Mesurflo® 2510**

**Sizes: 1/2", 3/4" and 1"**

**GPM: 0.5 - 9.0**

**Type: Inline Automatic  
Balancing Valve**

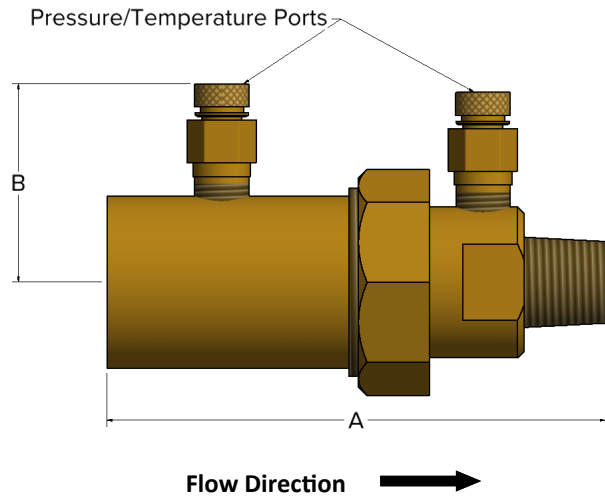

**Standard Features:**

- FNPT and MNPT Inlet/Outlet Connections
- Changeable GPM Flow Cartridges
- Differential Operating Pressure:  
2 - 80 PSID 0.5 - 5.0 GPM  
3 - 80 PSID 5.5 - 9.0 GPM
- ± 10% Accuracy
- Operating Temperature Range 32°F to 225° F
- 1/4" Pressure/Temperature Ports
- Dryseal Pipe Threads
- Valve Body Suitable for 600 PSIG
- Valves Labeled with Model Number, Size and Flow Rate

**Options:**

- Pressure Taps
- Extended Pressure/Temperature Ports
- Stainless Steel Tag-Chain Upon Request

Material Specifications	
Valve Body	Brass
Union Nut	Brass
Tailpiece	Brass
Pressure/Temperature Ports	Brass
O-Rings	EPDM
Diaphragm	EPDM
Retainer Ring	Stainless Steel
Orifice	Polyphenylsulfone

Dimensions			
A		B	
in	mm	in	mm
4.9	124.5	2.0	50.8

This product complies with the requirements of the Buy American Act (BAA). Proudly assembled in the USA, we are dedicated to delivering superior product quality while supporting government initiatives to source materials and components from domestic suppliers and suppliers in qualifying countries.