




**Model: Mesurflo® 2515**

**Sizes: 1/2" and 3/4"**

**GPM: 0.5 - 9.0**

**Type: Y-Ball Automatic  
Balancing Valve**

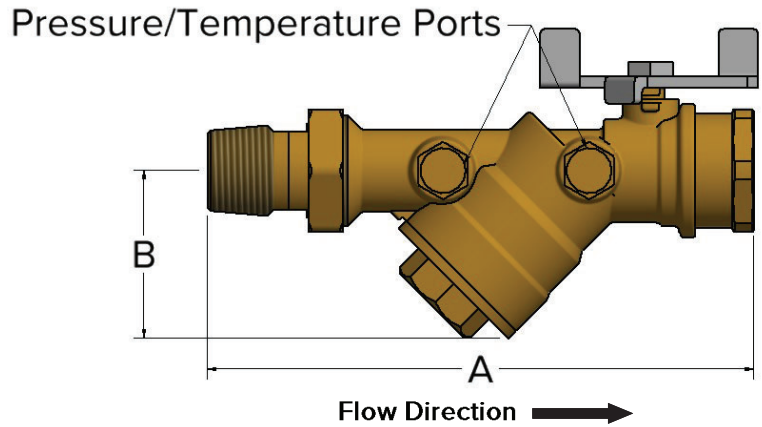

**Standard Features:**

- FNPT, FSWT and MNPT Outlet/Inlet Connections
- Changeable GPM Flow Cartridges
- Differential Operating Pressure:  
2 - 80 PSID 0.5 - 5.0 GPM  
3 - 80 PSID 5.5 - 9.0 GPM
- ± 10% Accuracy
- Operating Temperature Range 32°F to 225°F
- 1/4" Pressure/Temperature Ports
- Lever or Short Handle (Pictured)
- Inlet and Outlet Port Options
- Valves Labeled with Model Number, Size and Flow Rate
- Dryseal Pipe Threads
- Valve Body Suitable for 600 PSIG

**Options:**

- Extended Lever Handles Only
- Extended Pressure/Temperature Ports
- Stainless Steel Tag-Chain Upon Request

Material Specifications	
Valve Body	Brass
Ball	316 Stainless Steel
Pressure/Temperature Ports	Brass
O-Rings	EPDM
Ball Seat	Teflon
Stem	316 Stainless Steel
End Cap	Brass
Diaphragm	EPDM
Ball Valve End Fitting	Brass
Short Handle	Zinc Plated Steel
Orifice	Polyphenylsulfone

Dimensions			
A		B	
in	mm	in	mm
6.5	165.1	3.5	88.9